

CONSTIX® Sealed Foam Swab SF-6

Flexible tip sealed foam swab

CONSTIX® SF-6 sealed foam swab consists of 100 PPI polyurethane foam adhesive-bonded to a flexible nylon tip. The tip is mechanically secured within a tubular polypropylene handle.

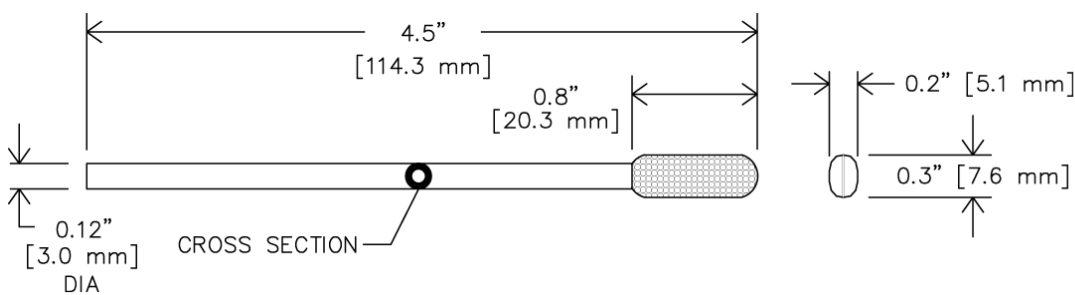
The polyurethane foam head provides good particle entrapment for removal and solvent compatibility. The absorbant foam enables solvents, such as isopropanol and ethanol, to be readily sorbed for applications involving solvent delivery or removal.



Though compatible with many common solvents, the SF-6 is not recommended for use with ketones such as acetone or MEK.



Features	Benefits
Flexible nylon tip	<ul style="list-style-type: none"> Allows for a softer application or removal
Polyurethane foam head	<ul style="list-style-type: none"> Provides good particle entrapment and solvent compatibility

Part No.	Description	Size	Packaging
SF-6	CONSTIX Sealed foam swab	Head dimension: 0.3" x 0.8" (7.6 x 20.3 mm) Handle diameter: 0.12 (3.0 mm) Total length: 4.5" (114.3 mm)	500/case



Product Information	
Head material	<ul style="list-style-type: none"> • 100 PPI closed-cell polyurethane foam
Handle material	<ul style="list-style-type: none"> • Polypropylene handle with nylon tip
Construction	<ul style="list-style-type: none"> • Epoxy adhesive of foam to tip; tip mechanically secured in tubular handle
Packaging materials	<ul style="list-style-type: none"> • Outer bags (OB1, OB2): low density polyethylene (LDPE)  Case (CS): corrugated fiberboard (PAP) 

Recycle Symbols



Packaging	EA/OB1	OB1/OB2	OB2/CS	EA/CS
SF-6	50	10	1	500

EA = each; OB = outer bag; CS = case